


Assembly Instructions


RLS-1MD-70T

Parts and Tools list


NO	Name	Qty	NO	Name	Qty
1	Support Beam	1	11	4mm Hex Spanner	1
2	Foot Pad	4	12	5mm Hex Spanner	1
3	Foot Margin	2	13	M6*12 Screw	8
4	M8*16 Screw	8	14	Rubber Cushion	6
5	Bracket	2	15	Spanner	1
6	M6*14 Screw	8	16	ST3.5*19 Screw	2
7	Lifting System	1set	17	ST4.8*19 Screw	8
8	M6*10 Screw	8			
9	Driveshaft	1set			
10	2.5mm Hex Spanner	1			

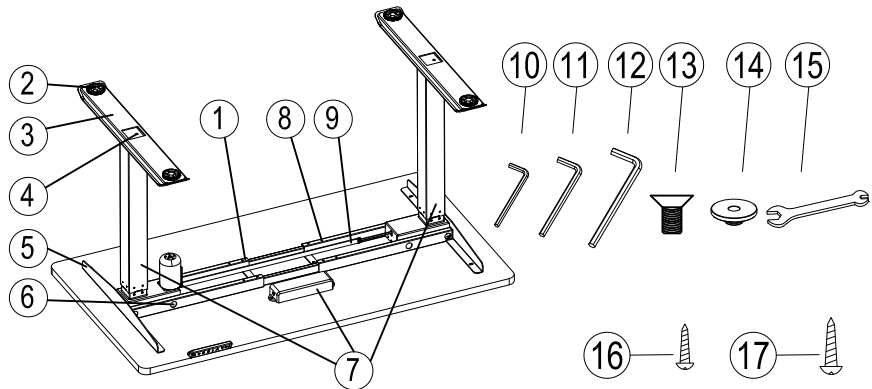


1 Loosen the 4 screws of beam using 4MM hex spanner, adjust the beam to proper position to fit the desktop

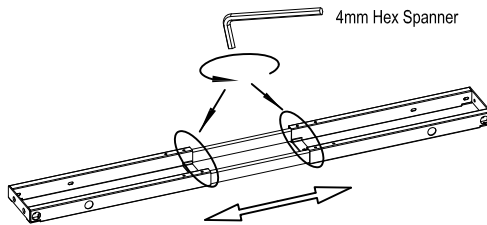


2 Attach legs to the beam using 8 of M6*14 screws and 4 of M6*12 screws

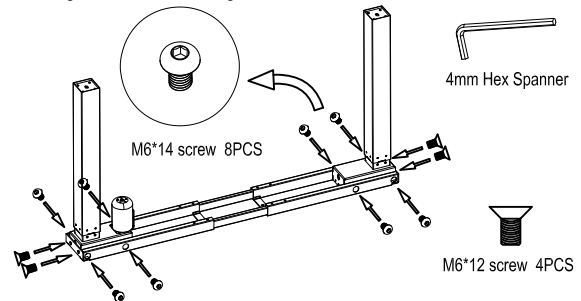


3 Attach feet to the legs using 8 of M8*16 screws, attach the 4 of levelling foot pads to the feet by hand

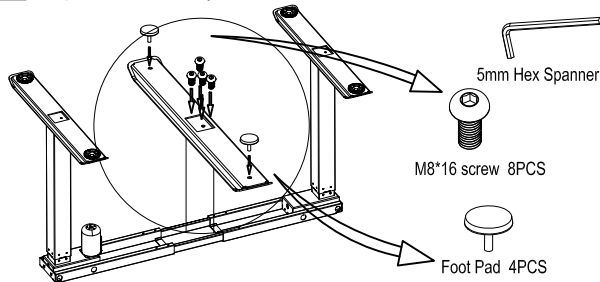


4 Overturn frame and attach brackets to beam using 4 of M6*12 screws, and then fir the rubber cushions to the brackets and beams

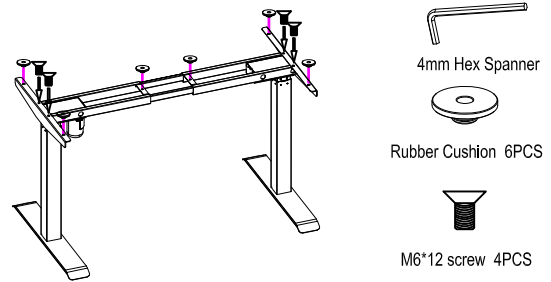


5 Loosen nut on each end of the transmission rod using spanner, connect the hex rod of the main leg to one end of the transmission rod and the hex rod of the transmission rod insert into the other leg

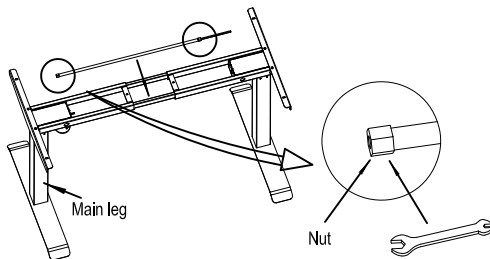

6 Overturn frame put on the table, distance from frame to table should keep the same (usually 5-8cm) tighten the screws on the beam and transmission rod

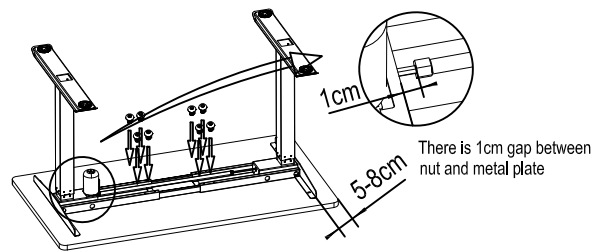

7 Attach the control box to the underside of the desktop using 8 of ST4.8 self-tapping screws, attach handset to the underside of desktop using 2 of ST3.5 self-tapping screw

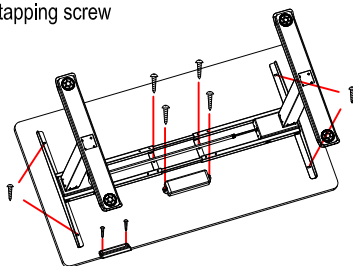

8 Connect the control box to the handset and to the motor

